

Terrain Mapping and Classification Using Neural Networks

Alberto Yukinobu Hata,
Denis Fernando Wolf
Mobile Robotics Laboratory
University of São Paulo
São Carlos, São Paulo, Brazil
hata, denis@icmc.usp.br

Gustavo Pessin,
Fernando Santos Osório
Mobile Robotics Laboratory
University of São Paulo
São Carlos, São Paulo, Brazil
pessin@gmail.com,
fosorio@icmc.usp.br

ABSTRACT

This paper describes a three-dimensional terrain mapping and classification technique to allow the operation of mobile robots in outdoor environments using laser range finders. We propose the use of a multi-layer perceptron neural network to classify the terrain into navigable, partially navigable, and non-navigable. The maps generated by our approach can be used for path planning, navigation, and local obstacle avoidance. Experimental tests using an outdoor robot and a laser sensor demonstrate the accuracy of the presented methods.

Keywords

Terrain and environment mapping, terrain segmentation, mobile robots, laser range finders.

1. INTRODUCTION

Mobile robotics is a field of robotics focused on the development of devices capable of moving autonomously to perform predetermined tasks. In order to navigate safely, robots use perception sensors like lasers and cameras to get information from the environment and detect potential obstacles. Usually, these sensors are also used to create internal models of the environment (maps), which allow localization and path planning. In mobile robots navigation, maps are widely used to create terrain computer representations. Therefore, using terrain classification methods, it is possible to identify navigable portions of the land, allowing the robot to use the safest routes when navigating [11].

Most robotic mapping algorithms in the literature represent the environment with either two or three-dimensions. In 3D maps, the models are more detailed and usually applied to

represent complex spaces like urban modeling. Among the most used 3D representation methods, we can cite point clouds, triangular meshes, and planar structures. The disadvantage of this representation is the requirement for a considerable storage space for modeling large environments.

On the other hand, 2D maps require less computational resources, since they are generally represented by grids of cells. Thus these can be easily used to represent traversable paths [11]. One of the most important applications of maps in mobile robotics is navigation. In most cases, the robot uses a model of the environment to plan routes to a specific location avoiding obstacles. When working on outdoor, it is also necessary to avoid regions of the environment that are not appropriate for navigation like gravel, rocks and holes. In most 2D mapping approaches these features are not identified by the range sensors, once they usually only scan a horizontal plane in front of the robot. In these cases, a 3D map of the terrain can be used to correctly represent the details of the environment. This paper shows a 3D terrain mapping technique and an artificial neural network-based classification approach. Our algorithm is capable of converting the 3D map of the environment into a 2D grid, where each cell is further classified into navigable, partially navigable, or non-navigable. The classification is performed by a multi-layer perceptron neural network that use the map information as input and generate the terrain classification output. Comparing to other works in the literature, most other approaches classify each 3D point, which demands a high computational load to perform. As we classify grid cells, the number of cells to be classified is considerably lower than the number of points of the 3D map, considerably improving the computational demand during the classifications process.

1.1 Related Works

Due to its importance in robotics, environmental mapping has motivated the publication of several works by the scientific community.

Among them we can cite the technique proposed by [14] to generate accurate maps of terrain using a 2D LRF. To remove noises in generated maps, a filter that removes corrupted pixels and lost data has been developed. In another approach,

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee.

[10] presents a multi-robotic system equipped with a laser sensor to allow the construction of three-dimensional maps of cyclic environments in real time. To create 3D maps of urban structures with high precision, the method proposed by [2], associates images captured by a camera with data given by a LRF. Consequently, it could estimate the motion of the robot and allow the construction of detailed 3D maps.

Besides these works, there are others devoted to identification of navigable areas by extracting information of mapped terrains. Determine which ways are safe is essential for outdoor navigation. In [13], the mapping task is done using a 2D laser sensor that combines information acquired by an odometer and an IMU. In this technique, flat terrain (e.g. walkways) is classified as navigable and irregular terrain (e.g. grass, gravel) is classified as non-navigable. This classification algorithm is based on Hidden Markov Model. The work presented in [9] investigates a mapping technique that uses 3D laser range finder to make possible robot navigation in vegetated terrains. The work by [5] applies a 3D laser sensor to perform classification of the whole environment. The elements of the scene are segmented into three classes, which are, surface (e.g. ground), linear structures (e.g. cables and trunks) and dispersed structures (e.g. grass). The segmentation algorithm uses a Bayesian classifier.

Video cameras have also been widely employed in terrain classification. In [7] is presented a method for terrain segmentation that combines information obtained from a LRF and the image captured by a camera. Colors and textures extracted from the images are used to classify the land as ill-structured, gravel and asphalt. Finally, in [12] a camera and a vibration sensor have been used to classify terrain covered by the robot.

2. MAPPING

Mapping is a fundamental task to allow robot automation [10] [13]. Through the maps robots are able to estimate their own position in the environment and plan a path to a particular location [6], which are the basic functionalities to navigate autonomously.

The mapping process consists on generating computer models of the real scenarios from data collected by sensors. Most mapping techniques are based on either distance sensors (e.g. laser range finders and sonar) or video cameras.

The work presented in this paper is based on a laser range finder data. This type of sensor has the advantage of having high accuracy, ability to directly acquire the distance to obstacles, and their readings are little influenced by variation of environmental conditions.

Part of the mapping techniques focus on creating a computational model of the terrain. It is particularly useful when the robot navigates in outdoor environments, where the ground is not flat. In these cases, it is necessary to identify the regions that can be safely traversed by the robot. Therefore, besides the map of the terrain, it is also necessary to classify the terrain according to its navigability.

2.1 Terrain Mapping

In our terrain mapping experiments we have used a 2D laser sensor with -10° inclination to the ground. In this

configuration, the sensor was able to detect the ground approximately 2 meters ahead of the robot. The LRF has been configured to perform 181 points measurements at 10Hz. Each measurement is represented by a value that corresponds the distance from the laser sensor to the detected obstacle in a particular direction. This sensor is equipped in a Pioneer AT robot, which can operate on outdoors (figure 1).

Besides the data provided by the LRF, the mapping algorithm requires robot motion information in order to build the map. This information has been provided by the internal odometer of the robot in our tests.

The first step to build the map is the analysis of the components that form the laser beam in the zx surface (figure 2)). Based on H and D values, it is possible to determine the longitudinal distance d and the height of the point l_z detected by laser. Through trigonometric calculations, we find:



Figure 1: Pioneer AT Robot used in the experiments.

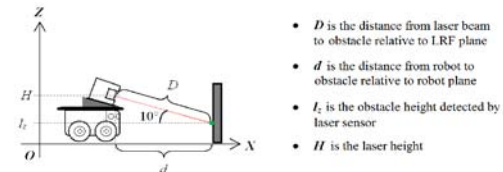


Figure 2: Laser beam decomposition in zx surface.

$$d = D \cdot \cos(10^\circ). \quad (1)$$

$$l_z = H - D \cdot \sin(10^\circ). \quad (2)$$

The x and y coordinate values are directly obtained from robot position information. Figure 3 shows the same laser scanning model of the figure 2 seen above. With the ABC triangle, we can determine the obstacle coordinate values l_x and l_y that has the following expression:

$$l_x = p_x + D \cdot \cos(\theta + \alpha). \quad (3)$$

$$l_y = p_y + D \cdot \sin(\theta + \alpha). \quad (4)$$

The l_x , l_y and l_z coordinates refer only to one laser reading. Thus, transformations are done in all subsequent scanned points to obtain a dense map of the environment. In this manner, the mapping algorithm is capable to obtain the values of l_x , l_y and l_z for all points obtained at each laser reading.

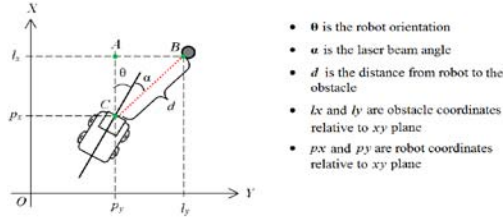


Figure 3: Laser beam decomposition in xy surface.

3. ARTIFICIAL NEURAL NETWORKS

Artificial neural networks (ANNs), are mathematical models inspired by the way biological nervous systems process information. Several different approaches of neural networks have been proposed in the literature for more than 4 decades [4] [1]. Most of them are composed by a large number of highly interconnected processing elements called neurons. Among applications, neural networks have been widely applied to extract patterns and detect trends that are too complex to be identified by either humans or other computer techniques. In robotics, this approach has been successfully used in control systems. The major advantage of ANN is the capability of generalization and handle large number of data. In this work, we have used a multilayer perceptron (MLP), which is of a feed forward neural network model that maps sets of input data onto specific outputs. The MLP model consists of input, output and one or more hidden (intermediate) layers [3]. Every neuron of each layer is connected to every other neuron of the previous and the next layers with a certain weight.

In order to correctly map the input data to an expected output, it is necessary to appropriately set the connection weights of the neurons. This task is usually known as learning. As MLP consists of a supervised learning technique, it is necessary to use previously classified examples to train the neural network, so it can adapt the weights (learn) and correctly classify other data that follow the same pattern. A MLP learning algorithm is the back propagation technique [8], which estimates the weights based on the amount of error in the output compared to the expected results.

3.1 Map Classification

In this work, ANNs were applied to classify terrain portions into one of three categories: navigable (e.g. ground, pathways), nonnavigable (e.g. walls, curbs) and partially navigable (e.g. grass). To facilitate this process, the terrain map was represented by 2D grids, so each cell corresponds a small fragment of the land. The neural network used to classification has three layers (input, hidden and output). The input layer has two units, where one represents absolute height of grid cells and the other one characterizes the relative hight between neighbouring cells. Consequently this ANN depends only on altitude and slope of the land. In order to analyze the neural network performance, the hidden layer was configured with different numbers of units. Finally, the last layer is organized with three binary outputs, which each unit represents one terrain category. The JavaNNS framework was used to build and train the networks for classification. Figure 4 illustrates a classifier network with

four hidden units used in the experiments.

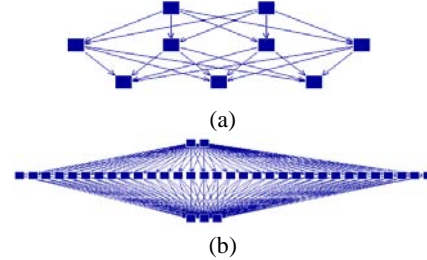


Figure 4: Neural networks used in terrain classification. (a)ANN with 4 hidden units; (b)ANN with 32 hidden units.

4. RESULTS

In order to validate the approaches proposed in this paper, we performed experimental tests in outdoor environments using a Pioneer 3 AT robot and a SICK LMS200 laser range finder (Figure 5(a)). As it can be seen in Figure 5(b) that the 3D terrain mapping algorithm could generate a precise representation of the environment. The columns and the grass can be easily identified in the 3D model.

After building the 3D map, a 2D grid map has been generated based on the absolute altitude (difference between the altitude of the robot and the terrain point) and the maximum altitude difference between the 3D points in a given cell. These two values had been used as input of the ANN for terrain classification. In order to know which ANN configuration best fits in the terrain classification of the 2D maps, it was tested neural network classifiers with 4, 8, 16 and 32 hidden units. In the learning process, each network configuration was trained with 628 training patterns and 363 validating patterns. The learning algorithm was set to execute 8000 learning cycles and 1000 update steps. In the experiments, all three networks obtained very similar performance. Table 1 shows the percentage of wrong, right and unknown patterns matches for the three networks. Figure 5 illustrates the terrain map of figure 5 classified with 4 and 32 hidden neurons, respectively. It is also relevant to mention that the classification results obtained with 8 and 16 hidden neurons were also very similar. Comparing these results, we can evidence that the differences in the classification are minor, therefore, an ANN with four units is enough for correct terrain classification. Nevertheless, considering the learning error graph (Figure 6), we can noticed that the topology with 4 hidden units presented a larger MSE (Mean Squared Error) than the 32 hidden neurons topology. Although the numerical difference of the error is considerable, the final classification of the cells used for validation were exactly the same. We can also notice that the classification of the entire map (Figures 5(c) and (d)) is very similar.

right	99.36%	624 patterns
wrong	0.48%	3 patterns
unknown	0.16%	1 patterns

Table 1: Statistics for classification results

5. CONCLUSION

Terrain mapping is a important capability to allow mobile

robots to operate in outdoor environments. This paper presented a 3D map technique based on a laser range finder information. The 3D maps are capable to represent fine details in the environment, as can be seen in the results presented. We also proposed a terrain classification technique based on artificial neural networks. More precisely, we converted the 3D map into a 2D grid representation and used the information of each 2D cell as input of a multi-layer perceptron neural network that classify that cell according to the navigability of the terrain.

The terrain mapping and classification techniques have been validated through experimental tests and the results obtained confirm the efficiency of our approaches. Four neural network topologies have been tested and more than 99% of the cells in the environment have been correctly classified.

Future work includes the use of other machine learning techniques to improve the terrain classification results and the integration of the terrain classification techniques to path planning algorithms.




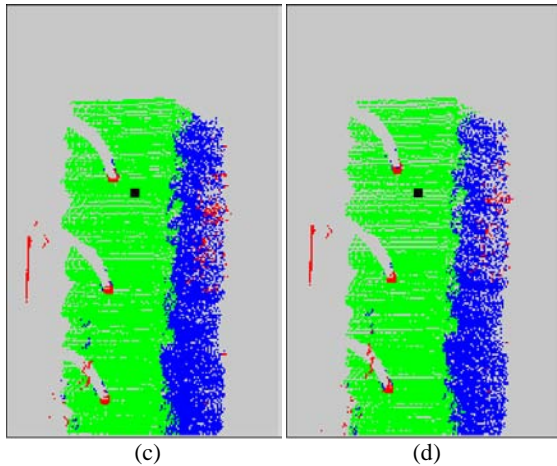


Figure 5: Mapping a path with low grass in the side. (a)Environment picture; (b)3D map of the environment; (c)Classified network using 4 hidden units and (d)using 32 units. Green color corresponds to navigable terrain, red color corresponds to the non-navigable terrain, and blue color corresponds to partially navigable terrain.

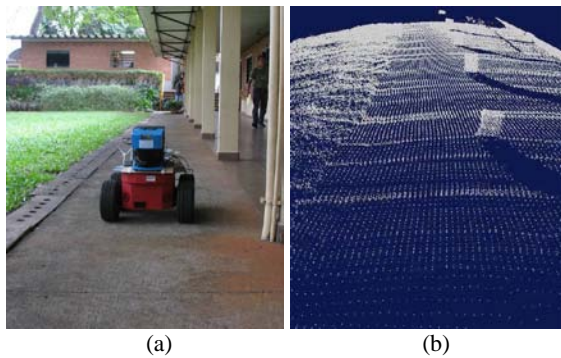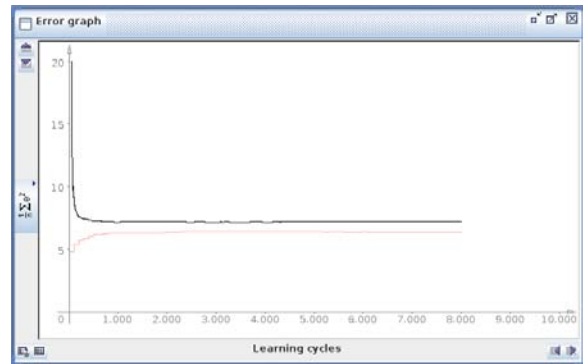

(a)

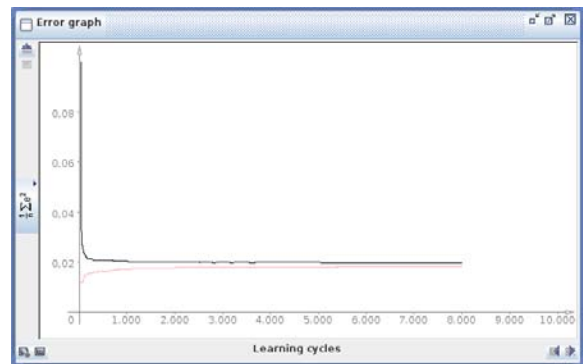

(b)

Figure 6: MSE error graphs for learning process of neural network with (a) 4 hidden units and (b) 32 hidden units. The red line corresponds to validation set error and the black line corresponds to training set error.

6. ACKNOWLEDGMENTS

The authors acknowledge the support granted by FAPESP process 2008/02204-4, and CNPq and FAPESP to the INCT-SEC (National Institute of Science and Technology - Critical Embedded Systems - Brazil), processes 573963/2008-9 and 08/57870-9.

7. REFERENCES

- [1] C. M. Bishop. *Neural networks for pattern recognition*. Oxford University Press, Oxford, UK, 1996.
- [2] Y. Bok, Y. Hwang, and I. S. Kweon. Accurate motion estimation and high-precision 3d reconstruction by sensor fusion. *Robotics and Automation*, 2007 IEEE International Conference on, pages 4721–4726, April 2007.
- [3] P. S. Churchland and T. J. Sejnowski. *The Computational Brain*. MIT Press, Cambridge, MA, USA, 1994.
- [4] S. Haykin. *Neural Networks: A Comprehensive Foundation (2nd Edition)*. Prentice Hall, July 1998.
- [5] D. H. Jean-Francois Lalonde, Nicolas Vandapel and M. Hebert. *Natural terrain classification using three-dimensional lidar data for ground robot mobility*, 23(1):839 – 861, November 2006.
- [6] D. Kortenkamp, R. Bonasso, and R. Murphy. *AI-Based Mobile Robots: Case Studies of Successful Robot Systems*. MIT Press, Massachusetts, USA, 1998.

- [7] C. Rasmussen. Combining laser range, color, and texture cues for autonomous road following. *Robotics and Automation, 2002. Proceedings. ICRA '02.* IEEE International Conference on, 4:4320–4325 vol.4, 2002.
- [8] D. E. Rumelhart, G. E. Hinton, and R. J. Williams. Learning internal representations by error propagation. Pages 318–362, 1986.
- [9] H. Schafer, A. Hach, M. Proetzsch, and K. Berns. 3d obstacle detection and avoidance in vegetated off-road terrain. pages 923–928, May 2008.
- [10] S. Thrun, W. Burgard, and D. Fox. A real-time algorithm for mobile robot mapping with applications to multi-robot and 3d mapping. *Robotics and Automation, 2000. Proceedings ICRA '00.* IEEE International Conference on, 1:321–328 vol.1, 2000.
- [11] S. Thrun, W. Burgard, and D. Fox. *Probabilistic Robotics.* MIT Press, 2005.
- [12] C. Weiss, H. Tamimi, and A. Zell. A combination of vision and vibration-based terrain classification. pages 2204–2209, Sept. 2008.
- [13] D. Wolf, G. Sukhatme, D. Fox, and W. Burgard. Autonomous terrain mapping and classification using hidden markov models. *Robotics and Automation, 2005. ICRA 2005. Proceedings of the 2005 IEEE International Conference on,* pages 2026–2031, April 2005.
- [14] C. Ye and J. Borenstein. A new terrain mapping method for mobile robots obstacle negotiation. *Proceedings of the UGV Technology Conference at SPIE AeroSense Symposium,* pages 52–62, 2003.